



AC Series

Part number	AC100M063E058PTR	
Capacitance	10	μF
Voltage	63	VDC
Surge Voltage	79	VDC
Capacitance Tolerance (@120Hz, +20°C)	±20	%
Ripple current (max, @100kHz, +125°C)	700	mA
Dissipation factor(tanδ @120Hz, +20°C)	8	%
ESR (max, @100kHz, +20°C)	120	mΩ
Leakage Current (max, @ +20°C)*	6.3	μA
Size	6.3X5.8	mm
Operating temperature	-55 ~ +125	°C
Endurance	4000	h

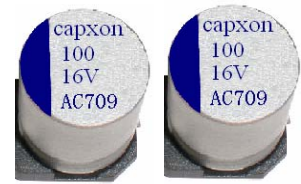

*I≤0.01CV or 3 μA max., whichever is greater
After 2 minutes measured with rated working voltage applied.
AEC-Q200 qualified

Test conditions	Endurance
Duration time	4000h @ 125°C
Applied voltage	Rated DC working voltage
After test requirements (+20°C):	
Capacitance change	≤ ±30% of initial measured value
Dissipation factor change	≤ 200% of the value specified
Leakage current*	≤ the value specified
ESR	≤ 200% of the value specified

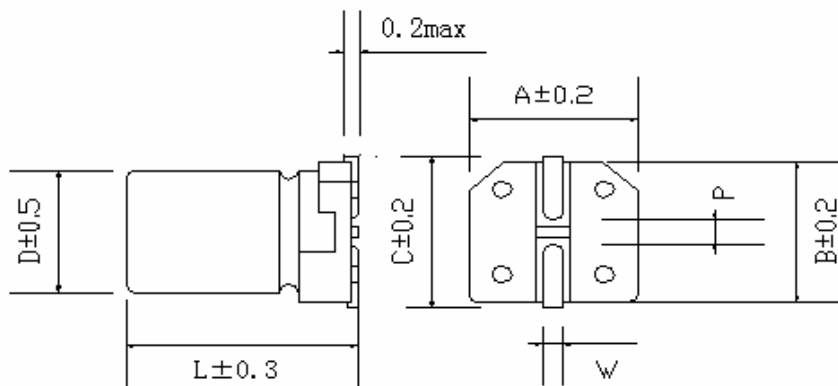

D	L	A	B	C	W	P±0.2
6.3	5.8	6.5	6.5	7.2	0.5~0.8	2.2

Series	Cap	Tol.	Voltage	Case D	Case L	Type	Lead Treatm.	Special
1_2	3_4_5	6	7_8_9	10	11_12_13	14	15_16	17_18_19_20
AC	100	M	063	E	058	P	TR	
	=10μF	=±20%	=63V	=6.3mm	=5.8mm	P=standard	=SMD tape and reel	
			

Specification and description for the component(s) are subject to change without notice. For packaging, handling, precautions and warning information, please visit our website: www.capxongroup.com