

ZV Series

Features

- ◆ Low impedance 100 KHz
- ◆ Reflow soldering is available
- ◆ Available for high density mounting
- ◆ Load life 2000 hrs at 105°C
- ◆ For detail specifications, please refer to Engineering Bulletin No.E135
- ◆ RoHS Compliant



SMD


Specifications

Item	Performance Characteristics																					
Operating Temperature Range	-55~ +105°C																					
Rated Voltage Range	6.3~50 VDC																					
Capacitance Range	1 to 3300 μF																					
Capacitance Tolerance	±20%(120Hz,+20°C)																					
Leakage Current (+20°C,max.)	0.01CV or 3(μA) After 2 minutes, whichever is greater measured with rated working voltage applied																					
Dissipation Factor (tan δ , at 20°C , 120Hz)	<table border="1"> <tr> <td>Working voltage(VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>D.F. (%) max.</td> <td>26</td> <td>19</td> <td>16</td> <td>14</td> <td>14</td> <td>12</td> </tr> </table>	Working voltage(VDC)	6.3	10	16	25	35	50	D.F. (%) max.	26	19	16	14	14	12							
	Working voltage(VDC)	6.3	10	16	25	35	50															
D.F. (%) max.	26	19	16	14	14	12																
Low Temperature Characteristics (at 120Hz)	Impedance ratio max																					
	<table border="1"> <tr> <td>Working voltage(VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>2</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-55°C / Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>	Working voltage(VDC)	6.3	10	16	25	35	50	Z-25°C / Z+20°C	2	3	2	2	2	2	Z-55°C / Z+20°C	8	6	4	4	3	3
	Working voltage(VDC)	6.3	10	16	25	35	50															
Z-25°C / Z+20°C	2	3	2	2	2	2																
Z-55°C / Z+20°C	8	6	4	4	3	3																
<p>Test conditions</p> <p>Duration time :2000 Hrs</p> <p>Ambient temperature :+105°C</p> <p>Applied voltage :Rated DC working voltage</p> <p>After test requirement at +105°C :</p> <p>Capacitance change :≤ ±25% of the initial measured value</p> <p>Dissipation factor :≤200% of the initial specified value</p> <p>Leakage current :≤The initial specified value</p>																						
Load Life	<p>Test conditions</p> <p>Duration time :1000 Hrs</p> <p>Ambient temperature :+105°C</p> <p>Applied voltage :None</p> <p>After test requirement at +20°C : Same limits as Load life.</p> <p>Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.</p>																					
	<p>The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing form the hot plate and restored at room temperature, they meet the characteristic requirements listed under.</p> <table border="1"> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>tan δ</td> <td>Less than specified value</td> </tr> </table>	Leakage current	Less than specified value	Capacitance change	Within ±10% of initial value	tan δ	Less than specified value															
Leakage current	Less than specified value																					
Capacitance change	Within ±10% of initial value																					
tan δ	Less than specified value																					
Shelf Life																						
Resistance to soldering heat																						

Multiplier for Ripple Current vs. Frequency

CAP(μF)\Frequency(Hz)	60(50)	120	400	1K	10K	50K-100K
CAP ≤ 10	0.47	0.59	0.76	0.85	0.97	1.0
10 < CAP ≤ 100	0.52	0.65	0.80	0.89	0.97	1.0

Diagram of Dimensions:(unit:mm)

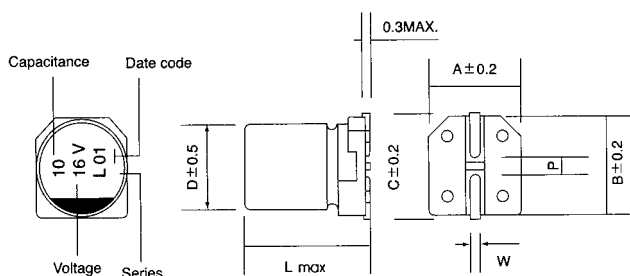

φD	L	A	B	C	W	P
4	5.5	4.3	4.3	4.9	0.5~0.8	1.0
5	5.5	5.3	5.3	5.9	0.5~0.8	1.4
6.3	5.5	6.6	6.6	7.2	0.5~0.8	2.2
6.3	6.3	6.6	6.6	7.2	0.5~0.8	2.2
6.3	7.7	6.6	6.6	7.2	0.5~0.8	2.2
8	6.5	8.3	8.3	9.0	0.5~0.8	2.3
8	10.5	8.3	8.3	9.0	0.7~1.1	3.1
10	10.5	10.3	10.3	11.0	0.7~1.1	4.5
12.5	14	13.5	13.5	15.0	1.0~1.4	5.5

Case Size

φ DxL(mm)

WV(V) Cap(μF)	6.3			10			16			25			35			50		
	Size	Ripple	imp.	Size	Ripple	imp.	Size	Ripple	imp.	Size	Ripple	imp.	Size	Ripple	imp.	Size	Ripple	imp.
2.2													4x5.5	53	5	4x5.5	53	5
3.3													4x5.5	53	5	4x5.5	53	5
4.7										4x5.5	53	5	4x5.5	53	5	4x5.5	53	5
6.8										4x5.5	58	4.5	4x5.5 5x5.5	65 85	4.0 2.8	5x5.5	65	4
10							4x5.5	65	5	4x5.5 5x5.5	74 80	3.7 2.6	4x5.5 5x5.5 6.3x5.5	90 98 110	3.5 2.5 2.4	5x5.5 6.3x5.5	90 100	3.5 2.5
15							4x5.5	70	4.6	5x5.5 6.3x5.5	100 115	2.2 1.8	5x5.5 6.3x5.5	120 140	1.8 1.5	6.3x5.5	130	1.8
22	4x5.5	53	3.5	4x5.5	80	2.6	4x5.5 5x5.5	83 110	3.0 2.6	5x5.5 6.3x5.5	128 140	1.7 1.5	5x5.5 6.3x5.5	140 150	1.4 1.3	6.3x5.5 6.3x6.3	140 150	1.5 1.45
27	4x5.5	65	3.2	5x5.5	85	2.4	5x5.5	135	1.9	6.3x5.5	145	1.4	6.3x5.5	165	1.2	6.3x7.7	160	1.35
33	4x5.5 5x5.5	80 82	2.8 2.6	4x5.5 5x5.5	85 110	2.3 2.1	5x5.5 6.3x5.5	160 170	2.2 1.5	5x5.5 6.3x5.5	145 175	1.4 1.3	6.3x5.5 6.3x7.7 8x6.5	185 210 230	1.2 0.9 0.8	6.3x7.7 8x6.5	170 180	0.8 0.75
47	4x5.5 5x5.5	82 85	2.4 2.2	5x5.5 6.3x5.5	130 160	2.0 1.5	5x5.5 6.3x5.5	170 185	2.0 1.5	6.3x5.5 6.3x7.7 8x6.5	180 195 220	1.2 0.8 0.75	6.3x5.5 6.3x7.7 8x6.5	200 220 240	1.0 0.75 0.7	6.3x7.7 8x6.5	200 220	0.79 0.72
56	5x5.5	94	1.70	6.3x5.5	180	1.45	6.3x5.5	195	1.3	6.3x5.5	195	1.15	6.3x7.7	230	0.73	8x10.5	260	0.68
68	5x5.5 6.3x5.5	100 120	1.6 1.3	6.3x5.5 6.3x7.7	195 210	1.4 1.3	6.3x5.5 6.3x7.7 8x6.5	205 210 220	1.2 1.1 1.0	6.3x5.5 6.3x7.7 8x6.5	200 210 230	1.1 0.75 0.7	6.3x7.7 8x6.5	240 250	0.7 0.68	8x10.5	300	0.6
100	5x5.5 6.3x5.5	110 160	1.5 1.1	6.3x5.5 6.3x7.7	210 230	1.3 1.2	6.3x5.5 6.3x7.7	210 220	1.1 0.9	6.3x7.7 8x6.5	220 250	0.75 0.7	6.3x7.7 8x10.5	270 350	0.67 0.5	8x10.5	310	0.55
150	6.3x5.5 6.3x7.7	170 195	0.95 0.85	6.3x5.5 6.3x6.3 8x6.5	220 230 240	1.0 0.9 0.8	6.3x7.7 8x6.5	225 240	0.8 0.7	8x10.5	420	0.5	8x10.5	430	0.45	10x10.5	540	0.28
220	6.3x5.5 6.3x6.3 6.3x7.7	195 200 210	0.6 0.59 0.57	6.3x7.7 8x6.5	245 255	0.60 0.55	6.3x7.7 8x6.5	250 260	0.75 0.66	8x10.5 10x10.5	480 500	0.3 0.28	8x10.5	450	0.25	10x10.5	570	0.26
330	6.3x7.7 8x6.5	230 250	0.51 0.49	8x10.5	400	0.36	8x10.5	470	0.34	8x10.5	510	0.26	10x10.5	570	0.23	12.5x14	620	0.25
470	8x10.5	380	0.45	8x10.5	470	0.32	8x10.5	520	0.3	10x10.5	570	0.18	12.5x14	900	0.15			
680	8x10.5	420	0.42	10x10.5	620	0.29	10x10.5	600	0.26				12.5x14	900	0.15			
1000	8x10.5 10x10.5	470 500	0.28 0.25	10x10.5	670	0.25				12.5x14	900	0.15						
1200	10x10.5	530	0.20				12.5x14	900	0.15									
1500	10x10.5	570	0.17				12.5x14	900	0.15									
2200				12.5x14	900	0.15												
3300	12.5x14	900	0.15															

Ripple current (mArms) at 105°C 100KHz
Max Impedance at 20°C 100KHz