

CapXon HT Series

HT Series 4 Terminals Snap-in Type 105°C

Features

- ◆ Premium industrial grade.
- ◆ Long life 2000 Hrs at +105°C with ripple current applied.
- ◆ Expected life : 75000 hrs at +65°C with ripple current applied.
- ◆ Various case sizes and vent construction.
- ◆ For detail specifications, please refer to Engineering Bulletin No. E114
- ◆ RoHS Compliant




Specifications

Item	Performance Characteristics									
Operating Temperature Range	-25 to +105°C									
Rated Voltage Range	160 ~ 400 VDC									
Capacitance Range	82 ~ 1200 µ F									
Capacitance Tolerance	± 20% (120Hz, +20°C)									
Leakage Current (+20°C,max.)	$I \leq 0.02CV$ After 5 minutes with rated working voltage applied.									
Dissipation Factor ($\tan \delta$, at 20°C , 120Hz)	15% max.									
Low Temperature Characteristics (at 120Hz)	Impedance ratio max									
	<table border="1"> <thead> <tr> <th>Working voltage (VDC)</th> <th>160</th> <th>200</th> <th>250</th> <th>400</th> </tr> </thead> <tbody> <tr> <td>Z -25°C / Z +20°C</td> <td>4</td> <td>4</td> <td>4</td> <td>8</td> </tr> </tbody> </table>	Working voltage (VDC)	160	200	250	400	Z -25°C / Z +20°C	4	4	4
Working voltage (VDC)	160	200	250	400						
Z -25°C / Z +20°C	4	4	4	8						
Load Life	Test conditions Duration time :2000 Hrs Ambient temperature :+105°C Applied voltage :Rated DC working voltage After test requirements at +20°C Capacitance change : $\leq \pm 20\%$ of the initial measured value Dissipation factor : $\leq 200\%$ of the initial specified value Leakage current : \leq The initial specified value									
	Test conditions Duration time :1000 Hrs Ambient temperature :+105°C Applied voltage :None After test requirements at +20°C : Same limits as Load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.									
Shelf Life	Test conditions Duration time :1000 Hrs Ambient temperature :+105°C Applied voltage :None After test requirements at +20°C : Same limits as Load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.									

Multiplier for Ripple Current vs. Frequency

CAP(µ F) \ Frequency(Hz)	50(60)	120	400	1K	10K	50K-100K
10 < CAP ≤ 100	0.8	1	1.23	1.36	1.48	1.53
100 < CAP ≤ 1000	0.8	1	1.16	1.25	1.35	1.38
1000 < CAP	0.8	1	1.11	1.17	1.25	1.28

Diagram of Dimensions:(unit:mm)

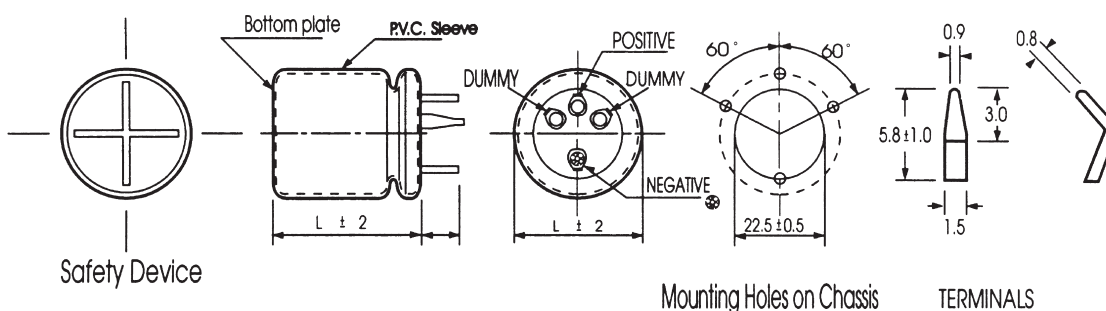

Snap-in

CapXon HT Series

Case Size

φ D x L (mm)

WV(SV) ψ D Cap(μF)	160 (200)				200 (250)			
	30		35		30		35	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
220					30x26	1.15		
270					30x26	1.22		
330	30x26	1.39			30x31	1.33		
390	30x26	1.47			30x31	1.47	35x27	1.47
470	30x31	1.64			30x36	1.54	35x32	1.54
560	30x31	1.76			30x41	1.69	35x32	1.69
680	30x36	1.98	35x32	1.98	30x46	1.90	35x37	1.90
820	30x41	2.36	35x32	2.36	30x51	2.24	35x42	2.24
1000	30x51	2.60	35x37	2.60				
1200	30x56	2.73						

WV(SV) ψ D Cap(μF)	250 (300)				400 (450)			
	30		35		30		35	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
82					30x26	0.73		
100					30x31	0.82		
120					30x36	0.87	35x27	0.87
150					30x41	1.00	35x32	1.00
180	30x26	0.98			30x46	1.06	35x37	1.06
220	30x31	1.10			30x51	1.18	35x42	1.18
270	30x31	1.22						
330	30x36	1.36	35x32	1.36				
390	30x41	1.47	35x32	1.47				
470	30x41	1.58	35x37	1.58				
560	30x51	1.76	35x42	1.76				

Ripple Current (A, rms) at 105°C 120Hz