

CapXon JV Series

JV Series Long Life, High CV

Features

- ◆ Chip type long life capacitance in large case sizes
- ◆ Chip type with load life of 3000 hours at +105°C
- ◆ Designed for surface mounting on high density PC board
- ◆ Applicable to automatic insertion machine using carrier tape
- ◆ For detail specifications, please refer to Engineering Bulletin NO.E155
- ◆ RoHS Compliant




Specifications

Item	Performance Characteristics						
Operating Temperature Range	-40~+105°C						
Rated Voltage Range	6.3~50 VDC						
Capacitance Range	0.1 to 1000 μ F						
Capacitance Tolerance	$\pm 20\%$ (120Hz, +20°C)						
Leakage Current (+20°C, max.)	$I \leq 0.01$ CV or 3 (μ A) After 2 minutes whichever is greater measured with rated working voltage applied.						
Dissipation Factor (tan δ , at 20°C, 120Hz)	Working Voltage(VDC)	6.3	10	16	25	35	50
	D.F.(%)max.	28	24	20	16	13	12
Low Temperature Characteristics (at 120Hz)	Impedance ratio max (at: 120Hz)						
	Working voltage(VDC)	6.3	10	16	25	35	50
	Z-25°C / +20°C	4	3	2	2	2	2
	Z-40°C / +20°C	10	7	5	3	3	3
Load Life	Test condition Duration time : 3000 Hrs Ambient temperature : +105°C Applied voltage : Rated DC working voltage						
	After test requirement at +20°C Capacitance change : Within $\pm 30\%$ of initial value Dissipation factor : Less than 300% of specified value Leakage current : Less than specified value						
Shelf Life	Test condition Duration time : 1000 Hrs Ambient temperature : +105°C Applied voltage : None						
	After test requirement at +20°C: Same limits as Load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.						
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 30 seconds.						
	Leakage current	Less than specified value					
	Capacitance change	Within $\pm 10\%$ of initial value					
	tan δ	Less than specified value					

Multiplier for Ripple Current vs. Frequency

CAP(μ F) \ Frequency(Hz)	60(50)	120	500	1K	$\geq 10K$
0.1~47 μ F	0.8	1.0	1.20	1.30	1.50
100~1000 μ F	0.8	1.0	1.10	1.15	1.20

Diagram of Dimensions:(unit:mm)

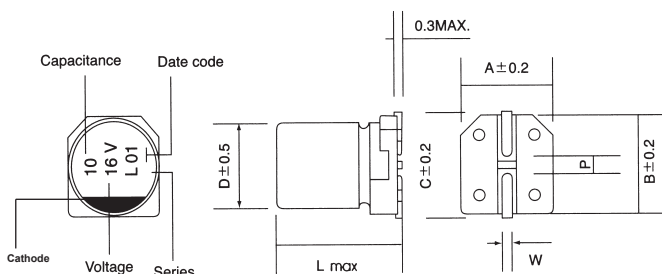

ϕ D	L	A	B	C	W	P
4	5.5	4.3	4.3	4.9	0.5~0.8	1.0
5	5.5	5.3	5.3	5.9	0.5~0.8	1.4
6.3	5.5	6.6	6.6	7.2	0.5~0.8	2.2
6.3	7.7	6.6	6.6	7.2	0.5~0.8	2.2
8	6.5	8.3	8.3	9.0	0.5~0.8	2.3
8	10.5	8.3	8.3	9.0	0.7~1.1	3.1
10	10.5	10.3	10.3	11.0	0.7~1.1	4.5

CapXon JV Series

Case Size

φDxL(mm)

WV(SV) Cap(μF)	6.3 (8)		10 (13)		16 (20)		25 (32)		35 (44)		50 (63)	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1											4X5.5	1.0
0.22											4X5.5	2.6
0.33											4X5.5	3.2
0.47											4X5.5	5.0
1.0											4X5.5	8.0
2.2											4X5.5	12
3.3											4X5.5	17
4.7							4X5.5	16	4X5.5	16	5X5.5	22
10					4X5.5	18	4X5.5	26	5X5.5	27	6.3X5.5	33
22	4X5.5	22	5X5.5	30	5X5.5	31	6.3X5.5	44	6.3X5.5	45	6.3X7.7	58
33	5X5.5	33	5X5.5	35	6.3X5.5	48	6.3X5.5	50	6.3X7.7	58	8X10.5	140
47	5X5.5	36	6.3X5.5	52	6.3X5.5	51	6.3X7.7	66	8X10.5	93	8X10.5	170
100	6.3X5.5	68	6.3X7.7	81	6.3X7.7	83	8X10.5	118	10X10.5	155	10X10.5	300
220	6.3X7.7	120	8X10.5	142	10X10.5	222	10X10.5	300	10X10.5	340		
330	8X10.5	230	10X10.5	280	10X10.5	305	10X10.5	395				
470	10X10.5	290	10X10.5	305	10X10.5	330						
1000	10X10.5	360										

Ripple Current (mA, rms) at 105°C 120Hz

SMD