


NK Series Non-polarized 105°C



Features

- ◆ NK Series for crossover networks of high-pitched, mean and low-pitched sounds in high-fidelity sound systems.
- ◆ The series offers excellent frequency characteristics and minimal capacitance deviation with frequency.
- ◆ For detail specifications, please refer to Engineering Bulletin No.E110
- ◆ RoHS Compliant


Specifications

Item	Performance Characteristics																																				
Operating Temperature Range	-40 to +105°C	-25 to +105°C																																			
Rated Voltage Range	6.3 to 100 VDC	160 to 250 VDC																																			
Capacitance Range	0.47 to 3300 µF	0.47 to 47 µF																																			
Capacitance Tolerance	±20%(120Hz,+20°C)																																				
Leakage Current (+20°C,max.)	I ≤ 0.03 CV or 3(µA) After 1 minute whichever is greater measured with rated working voltage applied.																																				
Dissipation Factor (tan δ , at 20°C , 120Hz)	<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160</td> <td>200</td> <td>250</td> </tr> <tr> <td>D.F. (%)max.</td> <td>25</td> <td>25</td> <td>20</td> <td>15</td> <td>15</td> <td>13</td> <td>10</td> <td>10</td> <td>15</td> <td>15</td> <td>20</td> </tr> </table> <p>For Capacitance > 1000 uF, add 2% per another 1000 uF</p>		Working Voltage(VDC)	6.3	10	16	25	35	50	63	100	160	200	250	D.F. (%)max.	25	25	20	15	15	13	10	10	15	15	20											
Working Voltage(VDC)	6.3	10	16	25	35	50	63	100	160	200	250																										
D.F. (%)max.	25	25	20	15	15	13	10	10	15	15	20																										
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio max</p> <table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table> <table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>160</td> <td>200</td> <td>250</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>2</td> <td>2</td> <td>3</td> </tr> </table> <p>For Capacitance > 1000 uF, add 0.5 per another 1000 uF for -25°C / +20°C add 1 per another 1000 uF for -40°C / +20°C</p>		Working Voltage(VDC)	6.3	10	16	25	35	50	63	100	Z-25°C / Z+20°C	4	3	2	2	2	2	2	2	Z-40°C / Z+20°C	8	6	4	3	3	3	3	3	Working Voltage(VDC)	160	200	250	Z-25°C / Z+20°C	2	2	3
Working Voltage(VDC)	6.3	10	16	25	35	50	63	100																													
Z-25°C / Z+20°C	4	3	2	2	2	2	2	2																													
Z-40°C / Z+20°C	8	6	4	3	3	3	3	3																													
Working Voltage(VDC)	160	200	250																																		
Z-25°C / Z+20°C	2	2	3																																		
Load Life	<p>Test conditions</p> <p>Duration time : 2000Hrs</p> <p>Ambient temperature : +105°C</p> <p>Applied voltage : Rated DC working voltage</p> <p>Each 250 hours, we will reserve the terminal and test the characteristics.</p> <p>After test requirement at +20°C</p> <p>Capacitance change : ≤ ±20% of the initial measured value</p> <p>Dissipation factor : ≤ 150% of the initial specified value</p> <p>Leakage current : ≤ The initial specified value</p>																																				
Shelf Life	<p>Test conditions</p> <p>Duration time : 1000Hrs</p> <p>Ambient temperature : +105°C</p> <p>Applied voltage : None</p> <p>After test requirement at +20°C: Same limits as Load life.</p> <p>Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.</p>																																				

Multiplier for Ripple Current vs. Frequency

CAP(µF) \ Frequency(Hz)	50(60)	120	400	1K	10K	50K-100K
CAP ≤ 10	0.8	1	1.30	1.45	1.65	1.70
10 < CAP ≤ 100	0.8	1	1.23	1.36	1.48	1.53
100 < CAP ≤ 1000	0.8	1	1.16	1.25	1.35	1.38

Diagram of Dimensions:(unit:mm)

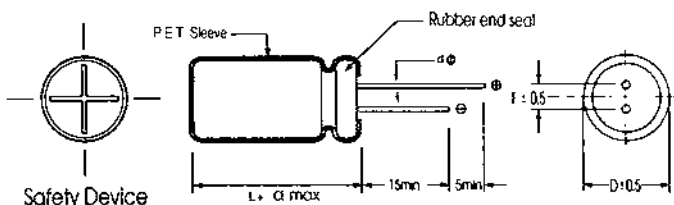

D φ	5	6.3	8	10	13	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
d φ	0.5		L < 20 0.5	L ≥ 20 0.6	0.6		0.8

α	D < 18		D = 18	
	1.5		L < 35.5 1.5	L ≥ 35.5 2.0

Case Size

WV (SV) / Cap(μF)		6.3 (8)		10 (13)		16 (20)		25 (32)		35 (44)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
10						5x1	53	6.3x11	34	5x11	38
22									55	6.3x11	65
33				5x11	59	5x11	62	6.3x11	72	8x11.5	75
47				5x11	79	6.3x11	90	6.3x11	96	8x11.5	107
100	5x11	99	6.3x11	99	6.3x11	99	8x11.5	152	10x12.5	198	
					8x11.5	123					
220	8x11.5	149	8x11.5	157	8x11.5	200	10x12.5	245	10x20	320	
					10x12.5	234					
330	8x11.5	190	10x12.5	235	10x12.5	255	10x16	310	13x20	370	
470	10x12.5	280	10x12.5	290	10x16	360	13x20	420	13x25	495	
1000	10x16	352	10x20	430	13x20	511					
2200	13x20	645	16x25	830	16x31.5	950					
3300	16x25	950	16x31.5	1150							

WV (SV) / Cap(μF)		50 (63)		63 (79)		100 (125)		160 (200)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47	5x11	8	5x11	9	5x11	10	5x11	12	
1	5x11	12	5x11	14	5x11	15	6.3x11	18	
2.2	5x11	17	5x11	20	5x11	20	8x11.5	28	
					6.3x11	22			
3.3	5x11	23	6.3x11	25	6.3x11	28	8x11.5	37	
4.7	5x11	30	6.3x11	30	6.3x11	32	10x12.5	45	
					8x11.5	36			
10	6.3x11	50	6.3x11	52	8x11.5	52	10x16	79	
					10x12.5	55			
22	8x11.5	85	8x11.5	88	10x16	120	13x20	140	
			10x12.5	92					
33	8x11.5	89	10x12.5	115	10x20	175	13x20	200	
47	10x12.5	123	10x16	150	13x20	187	13x25	215	
100	10x16	198	13x20	295	16x25	399			
	10x20	220							
220	13x20	340	13x25	420					
	13x25	375							
330	16x25	500							

WV (SV) / Cap(μF)		200 (250)		250 (300)	
		Size	Ripple	Size	Ripple
0.47	6.3x11	17	6.3x11	22	
1	8x11.5	21	8x11.5	25	
2.2	8x11.5	32	10x12.5	39	
3.3	10x12.5	40	10x16	43	
4.7	10x16	52	10x20	65	
10	10x20	86	10x20	109	
22	13x20	160	13x25	189	
33	13x25	213	16x25	250	

Ripple Current (mA, rms) at 105°C 120Hz