


CapXon SJ Series

SJ Series 7 mm 105°C Long Life

Features

- ◆ Design for space-saving and high density insertion.
- ◆ Applications: VTR, car radio, car stereos, charger, etc.
- ◆ For detail specifications, please refer to Engineering Bulletin NO. E146
- ◆ RoHS Compliant

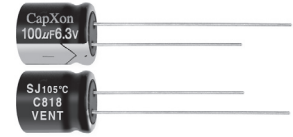



Specifications

Item	Performance Characteristics																								
Operating Temperature Range	-40 to +105°C																								
Rated Voltage Range	6.3 to 63 VDC																								
Capacitance Range	0.1 to 220 µF																								
Capacitance Tolerance	± 20% (120Hz, +20°C)																								
Leakage Current(+20°C, max)	I ≤ 0.01 CV or 3 (µA) After 1 minute, whichever is greater measured with rated working voltage applied.																								
Dissipation Factor (tan δ, at 20°C, 120Hz)	<table border="1"> <tr> <td>Working Voltage (VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>D.F. (%)max</td> <td>24</td> <td>20</td> <td>16</td> <td>14</td> <td>12</td> <td>10</td> <td>9</td> </tr> </table>	Working Voltage (VDC)	6.3	10	16	25	35	50	63	D.F. (%)max	24	20	16	14	12	10	9								
	Working Voltage (VDC)	6.3	10	16	25	35	50	63																	
D.F. (%)max	24	20	16	14	12	10	9																		
Low Temperature Characteristics (at 120Hz)	Impedance ratio max <table border="1"> <tr> <td>Working Voltage (VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Working Voltage (VDC)	6.3	10	16	25	35	50	63	Z-25°C / Z+20°C	4	3	2	2	2	2	2	Z-40°C / Z+20°C	8	6	4	4	3	3	3
Working Voltage (VDC)	6.3	10	16	25	35	50	63																		
Z-25°C / Z+20°C	4	3	2	2	2	2	2																		
Z-40°C / Z+20°C	8	6	4	4	3	3	3																		
Load Life	Test conditions Duration time :2000 Hrs Ambient temperature :+105°C Applied voltage :Rated DC working voltage After test requirements at +20°C Capacitance change :≤ ±20% of the initial measured value (4V : ≤ ±30%) Dissipation factor :≤ 200% of the initial specified value Leakage current :≤ The initial specified value																								
Shelf Life	Test conditions Duration time :1000 Hrs Ambient temperature :+105°C Applied voltage :None After test requirements at +20°C : Same limits as Load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.																								

Multiplier for Ripple Current vs. Frequency

CAP(µF) \ Frequency(Hz)	50(60)	120	400	1K	10K	50K-100K
CAP ≤ 10	0.8	1	1.30	1.45	1.65	1.70
100 < CAP ≤ 220	0.8	1	1.23	1.36	1.36	1.53

Diagram of Dimensions:(unit:mm)

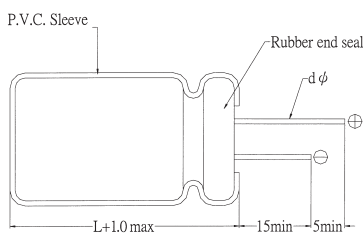

Dψ	4	5	6.3	8
F	1.5±0.5	2.0±0.5	2.5±0.5	3.5±0.5
dψ	0.45		0.5	

CapXon SJ Series

Case Size

φ DxD(mm)

WV(SV) Cap(μF)	6.3 (8)		10 (13)		16 (20)		25 (32)	
	Size	Size	Ripple	Ripple	Size	Ripple	Size	Ripple
4.7							4x7	17
6.8					4x7	19	4x7	19
10					4x7	28	4x7	28
15			4x7	26	4x7	30	5x7	33
22	4x7	28	4x7	32	4x7	35	5x7	43
33	4x7	32	5x7	48	5x7	50	6.3x7	62
	5x7	35						
47	5x7	47	5x7	51	6.3x7	67	8x7	75
68	5x7	50	6.3x7	68	6.3x7	70	8x7	80
					8x7	78		
100	6.3x7	75	6.3x7	80	8x7	110	8x7	115
			8x7	95				
220	8x7	92	8x7	130				

WV(SV) Cap(μF)	35 (44)		50 (63)		63 (79)	
	Size	Size	Ripple	Ripple	Size	Ripple
0.1			4x7	1.5	4x7	1.5
0.15			4x7	1.8	4x7	1.8
0.22			4x7	2.5	4x7	2.5
0.33			4x7	3.5	4x7	3.5
0.47			4x7	5	4x7	6
0.68			4x7	7	4x7	7
1			4x7	10	4x7	12
1.5			4x7	13	4x7	14
2.2			4x7	20	4x7	20
3.3			4x7	26	5x7	28
4.7	4x7	22	4x7	27	5x7	29
			5x7	29	6.3x7	33
6.8	4x7	24	5x7	32	6.3x7	35
	5x7	28	6.3x7	33		
10	5x7	35	6.3x7	38	6.3x7	40
15	5x7	38	6.3x7	52	8x7	55
	6.3x7	45				
22	6.3x7	60	8x7	63	8x7	65
33	6.3x7	50	8x7	78		
	8x7	68				
47	8x7	80				
68	8x7	85				

Ripple Current (mA, rms) at 105°C 120Hz

Radial