

Hybrid Conductive Polymer SMD

Overview of detailed parameters

Hybrid Conductive Polymer Capacitor

Series: **AU** NEW

High Ripple Current at 135°C Type



Mounting:
SMD Package


Voltage Range:
25V ~ 100V

Capacitance Range:
22uF ~ 680uF

Endurance:
4000h @ 135°C

Features:

- Ultra-Low ESR and highest ripple current
- **Vibration Proof (VP)** version (up to 30g) available
- **AEC-Q200** version available

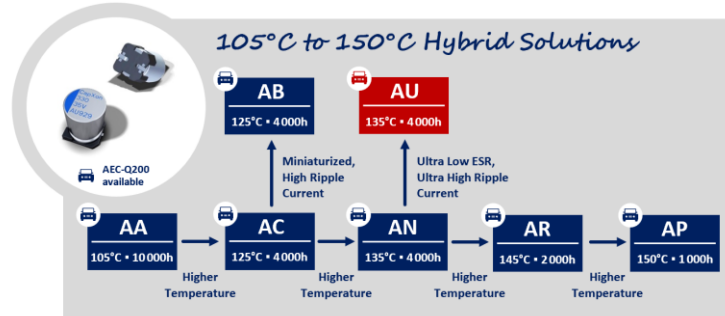

Applications:

	Automotive
	Audio
	Battery Chargers
	Controls & Drives
	Power Supply



Compliance :

- RoHS & REACH
- Halogen Free
- JIS-C-5101-25
- AEC-Q200



Production Status :

- Mass Production
- Samples Available