


YC SERIES ■ ECONOMY, LONG LIFE AT 125°C TYPE

KEY FEATURES




- HYBRID CONDUCTIVE POLYMER • SMD type
- Endurance: 125°C ■ 4 000 hours
- Low ESR and high ripple current
- Economy series for cost effective applications
- Lower leakage current than comparable solid polymer capacitors



SPECIFICATIONS

Items		Performance Characteristics
Operating Temperature Range		-55 ~ +125°C
Rated Voltage Range	V_R	16 ~ 100V DC
Surge Voltage	V_S	($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$
Capacitance Range	C_R	10 ~ 1500 μ F
Cap. Tolerance	ΔC	$\pm 20\%$ (120Hz ■ 20°C)
Leakage Current (20°C ■ V_R applied)	I_{LEAK}	Not to exceed the values shown in standard ratings After 2 minutes
Dissipation Factor % (20°C ■ 120Hz)	$\tan\delta$	Not to exceed the values shown in standard ratings
Equivalent Series Resistance (20°C ■ 100kHz)	ESR	Not to exceed the values shown in standard ratings
Lifetime Test		
Endurance 125°C (V_R & I_R applied)	Test	4 000 hours
	$\Delta C/C_R$	Within $\pm 30\%$ of the initial value
	$\tan\delta$	Less than 200% of the specified value
	ESR	Less than 200% of the specified value
	I_{Leak}	Less than the specified value

DIMENSIONS STANDARD PACKAGE ■ All dimensions in mm

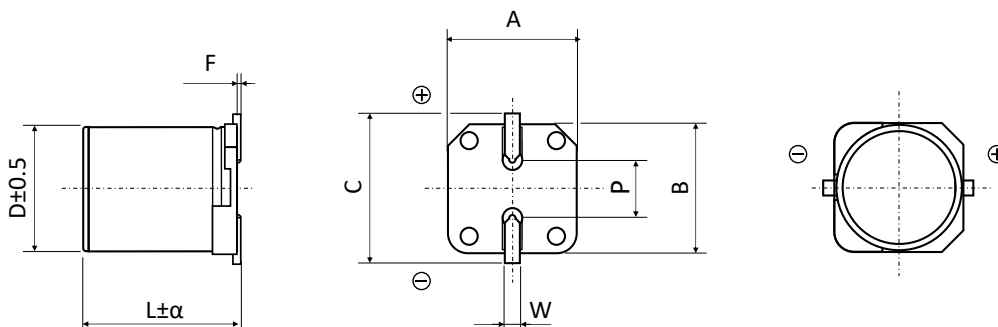



DIMENSIONS STANDARD PACKAGE ▪ All dimensions in mm

∅ D	L	α	A ± 0.2	B ± 0.2	C ± 0.2	F	P ± 0.2	W
5.0	5.8	0.3	5.3	5.3	5.9	0.3 max.	1.4	0.5 to 0.8
6.3	5.8	0.3	6.6	6.6	7.2	0.3 max.	2.2	0.5 to 0.8
6.3	7.7	0.3	6.6	6.6	7.2	0.3 max.	2.2	0.5 to 0.8
8.0	10.5	0.3	8.3	8.3	9.0	0.3 max.	3.1	0.7 to 1.1
8.0	11.7	0.3	8.3	8.3	9.0	0.3 max.	3.1	0.7 to 1.1
10.0	10.5	0.3	10.3	10.3	11.0	0.3 max.	4.5	0.7 to 1.1
10.0	12.4	0.3	10.3	10.3	11.0	0.3 max.	4.5	1.0 to 1.4
10.0	16.5	0.3	10.3	10.3	11.0	0.3 max.	4.5	1.0 to 1.4

STANDARD RATINGS

Part number shows blister tape on paper reel

V _R (V)	C _R (μF)	∅ D (mm)	L (mm)	I _{LEAK} (μA, 2min)	tanδ +20°C • 120Hz (%)	Max. ESR +20°C • 100kHz (mΩ)	I _R - Max. Ripple Current +125°C • 100kHz (mA rms)	CapXon Part Number
16	100	6.3	5.8	16.0	16	50	900	YC101M016E058PTR
	120	6.3	5.8	19.2	16	50	900	YC121M016E058PTR
	150	6.3	5.8	24.0	16	50	900	YC151M016E058PTR
	220	6.3	7.7	35.2	16	30	1400	YC221M016E077PTR
	270	6.3	7.7	43.2	16	30	1700	YC271M016E077PTR
	330	10	10.5	52.8	16	20	2000	YC331M016G105PTR
	470	8	10.5	75.2	16	27	1600	YC471M016F105PTR
	470	10	10.5	75.2	16	20	2000	YC471M016G105PTR
	560	8	11.7	89.6	16	23	1650	YC561M016F117PTR
	560	10	10.5	89.6	16	20	2000	YC561M016G105PTR
	820	10	12.4	131.2	16	16	2260	YC821M016G124PTR
1500	10	16.5	240.0	16	11	4000	YC152M016G165PTR	
25	33	5	5.8	8.3	14	80	550	YC330M025C058PTR
	56	6.3	5.8	14.0	14	50	900	YC560M025E058PTR
	100	6.3	7.7	25.0	14	30	1400	YC101M025E077PTR
	220	8	10.5	55.0	14	27	1600	YC221M025F105PTR
	270	8	11.7	67.5	14	25	1650	YC271M025F117PTR
	330	10	10.5	82.5	14	20	2000	YC331M025G105PTR
	470	10	12.4	117.5	14	16	2260	YC471M025G124PTR
	560	10	16.5	140.0	14	11	4000	YC561M025G165PTR



STANDARD RATINGS

Part number shows blister tape on reel version

V_R (V)	C_R (μF)	ϕD (mm)	L (mm)	I_{LEAK} (μA , 2min)	$\tan\delta$ +20°C • 120Hz (%)	Max. ESR +20°C • 100kHz (m Ω)	I_R - Max. Ripple Current +125°C • 100kHz (mA rms)	CapXon Part Number
35	22	5	5.8	7.7	12	100	550	YC220M035C058PTR
	47	6.3	5.8	16.5	12	60	900	YC470M035E058PTR
	68	6.3	7.7	23.8	12	35	1400	YC680M035E077PTR
	100	8	10.5	35.0	12	27	1600	YC101M035F105PTR
	150	8	10.5	52.5	12	27	1600	YC151M035F105PTR
	180	8	11.7	63.0	12	25	1650	YC181M035F117PTR
	270	10	10.5	94.5	12	20	2000	YC271M035G105PTR
	330	10	12.4	115.5	12	17	2260	YC331M035G124PTR
	470	10	16.5	164.5	12	11	4000	YC471M035G165PTR
50	10	5	5.8	5.0	10	120	500	YC100M050C058PTR
	22	6.3	5.8	11.0	10	80	750	YC220M050E058PTR
	33	6.3	7.7	16.5	10	40	1100	YC330M050E077PTR
	56	10	10.5	28.0	10	28	1600	YC560M050G105PTR
	68	8	10.5	34.0	10	30	1250	YC680M050F105PTR
	82	8	11.7	41.0	10	28	1300	YC820M050F117PTR
	100	10	10.5	50.0	10	28	1600	YC101M050G105PTR
	120	10	10.5	60.0	10	28	1600	YC121M050G105PTR
	120	10	12.4	60.0	10	25	1750	YC121M050G124PTR
220	10	16.5	110.0	10	13	3700	YC221M050G165PTR	
63	10	6.3	5.8	6.3	8	120	700	YC100M063E058PTR
	22	6.3	7.7	13.9	8	80	900	YC220M063E077PTR
	33	8	10.5	20.8	8	40	1100	YC330M063F105PTR
	47	8	10.5	29.6	8	40	1100	YC470M063F105PTR
	47	8	11.7	29.6	8	38	1130	YC470M063F117PTR
	56	10	10.5	35.3	8	30	1400	YC560M063G105PTR
	68	10	10.5	42.8	8	30	1400	YC680M063G105PTR
	82	10	12.4	51.7	8	22	1650	YC820M063G124PTR
	150	10	16.5	94.5	8	15	3500	YC151M063G165PTR
80	22	8	10.5	17.6	8	45	1050	YC220M080F105PTR
	27	8	11.7	21.6	8	43	1080	YC270M080F117PTR
	33	10	10.5	26.4	8	36	1360	YC330M080G105PTR
	47	10	10.5	37.6	8	36	1360	YC470M080G105PTR
	56	10	12.4	44.8	8	35	1440	YC560M080G124PTR
	68	10	12.4	54.4	8	32	1540	YC680M080G124PTR
100	22	8	10.5	22.0	8	55	950	YC220M100F105PTR
	22	8	11.7	22.0	8	52	980	YC220M100F117PTR
	22	10	10.5	22.0	8	45	1200	YC220M100G105PTR
	27	10	12.4	27.0	8	40	1360	YC270M100G124PTR
	33	10	12.4	33.0	8	40	1360	YC330M100G124PTR

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY


Frequency (Hz)	$100 \leq \text{Freq.} < 120$	$120 \leq \text{Freq.} < 200$	$200 \leq \text{Freq.} < 300$	$300 \leq \text{Freq.} < 500$
Coefficient K_f	0.10	0.10	0.10	0.15
Frequency (Hz)	$500 \leq \text{Freq.} < 1k$	$1k \leq \text{Freq.} < 2k$	$2k \leq \text{Freq.} < 3k$	$3k \leq \text{Freq.} < 5k$
Coefficient K_f	0.20	0.30	0.40	0.45
Frequency (Hz)	$5k \leq \text{Freq.} < 10k$	$10k \leq \text{Freq.} < 15k$	$15k \leq \text{Freq.} < 20k$	$20k \leq \text{Freq.} < 40k$
Coefficient K_f	0.50	0.60	0.65	0.75
Frequency (Hz)	$40k \leq \text{Freq.} < 50k$	$50k \leq \text{Freq.} < 100k$	$100k \leq \text{Freq.} < 500k$	$500k \leq \text{Freq.} < 1M$
Coefficient K_f	0.80	0.85	1.00	1.05

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

General Precautions & Guidelines	Packaging Information	Vibration Test Profiles	3D Models	Reliability Tests

GROUP CHART

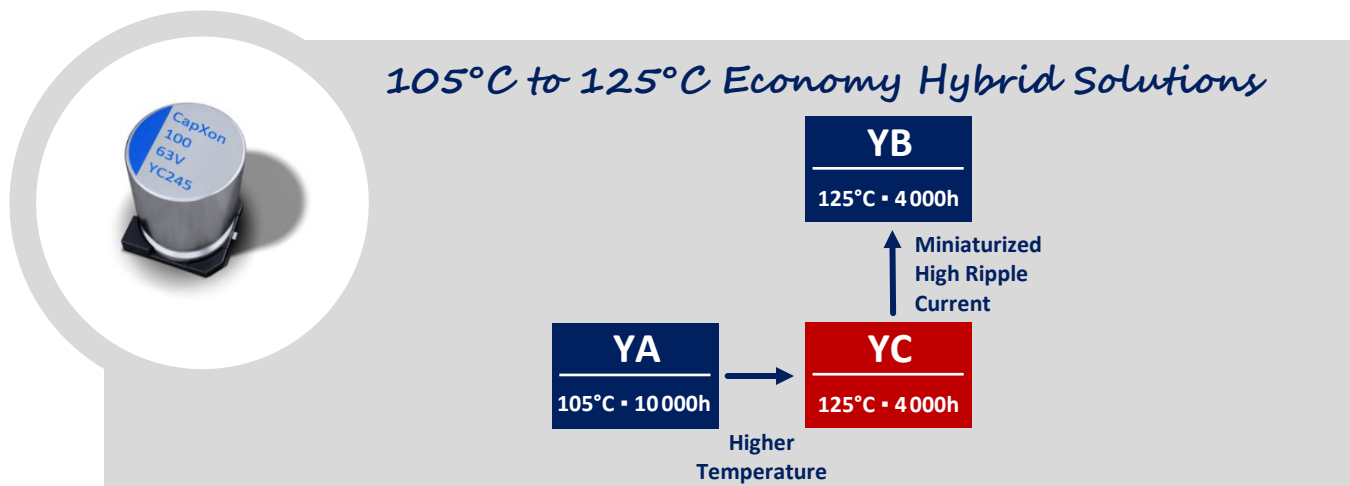



DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.