

New Liquid SMD

Overview of detailed parameters

Aluminum Electrolytic Capacitor

Series: **GV** NEW

High Temp, Automotive 150°C Type



Mounting:
SMD Package


Voltage Range:
10V ~ 50V

Capacitance Range:
33uF ~ 3300uF

Endurance:
1000h @ 150°C

Features:

- Especially for applications with highest ambient temperatures
- Vibration-proof (VP) version (up to 30g) available upon request
- AEC-Q200 version available

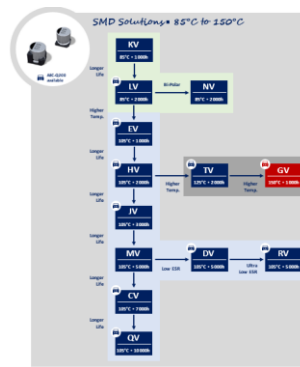

Applications:

	Automotive
	Renewable
	Welding
	Traction
	Power Supply



Compliance :

- RoHS & REACH
- Halogen Free
- JIS-C-5101-25



Production Status :

- Mass Production
- Samples Available