

## Overview of detailed parameters

### Conductive Polymer Capacitor

Series: **PM** NEW

Low Height Package



**Mounting:**  
SMD Package


**Voltage Range:**  
2.5V ~ 100V

**Capacitance Range:**  
4.7uF ~ 560uF

**Endurance:**  
2000h @ 105°C

#### Features:

- Low height for space critical applications
- Large permissible ripple current
- No dry-out effect guarantees extremely long life

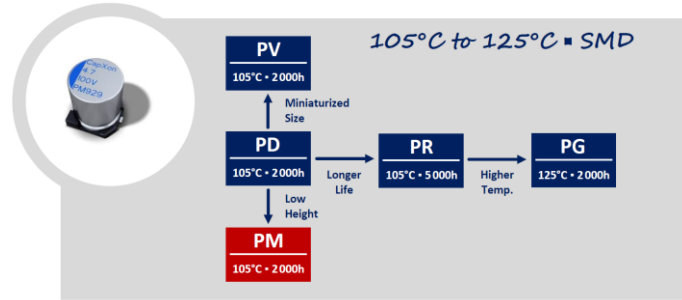

#### Applications:

	Data Centers
	Industrial
	Audio
	White Goods
	Power Supply



#### Compliance :

- RoHS & REACH
- Halogen Free
- JIS-C-5101-25

#### Production Status :

- Mass Production
- Samples Available

