

Aluminum Electrolytic Capacitor THT

Overview of detailed parameters

Aluminum Electrolytic Capacitor

Series: **UF** NEW

High Ripple Current, Automotive 105°C Type



Mounting:
Snap-in Type


Voltage Range:
200V ~ 500V

Capacitance Range:
56uF ~ 2700uF

Endurance:
5000h @ 105°C

Features:

- Endurance: 105°C • 5000 hours
- Useful life: 105°C • 10 000 hours
- Especially for applications with demanding operating environment
- Extremely stable dissipation factor and leakage current
- **AEC-Q200** version available

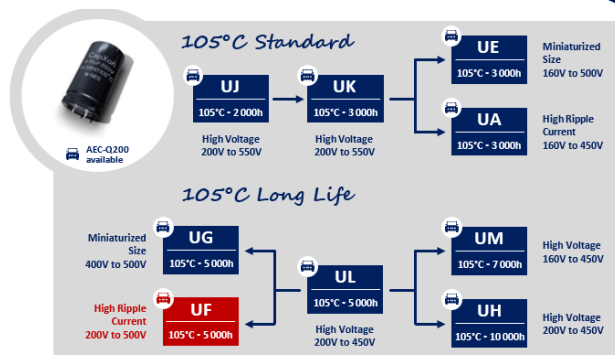

Applications:

	Automotive
	Renewable
	Welding
	Traction
	Power Supply



Compliance :

- RoHS & REACH
- Halogen Free
- JIS-C-5101-25
- **AEC-Q200**



Production Status :

- Mass Production
- Samples Available