

Hybrid Conductive Polymer SMD

Overview of detailed parameters

Hybrid Conductive Polymer Capacitor

Series: **YB** NEW

Economy, Miniaturized High Ripple Current Type



Mounting:
SMD Package


Voltage Range:
25V ~ 35V

Capacitance Range:
33uF ~ 680uF

Endurance:
4000h @ 125°C

Features:

- Low ESR and **extremely** high ripple current in small dimension
- Economy series for cost effective applications
- Lower leakage current than comparable solid polymer capacitors

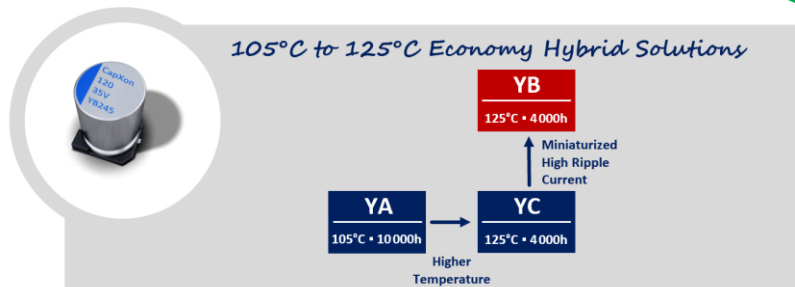

Applications:

	Automotive
	Audio
	Battery Chargers
	Controls & Drives
	Power Supply



Compliance :

- RoHS & REACH
- Halogen Free
- JIS-C-5101-25



ECONOMY



HIGH TEMPERATURE



MINIATURIZED SIZE

Production Status :

- Mass Production
- Samples Available